



Greige Galaxy

Finished Quilt 13" x 26"

Finished Block 3" x 3"

Fabric Requirements

A variety of Greige Goods prints.

1/2 yard light solid

1/3 yard gray print | Setting


1/4 yard gray print | binding

1/2 yard | backing

Cutting for one Greige Galaxy Star, cut 20


From one Greige Good print, cut:


1 square, 1 1/2" x 1 1/2"

4 squares, 1 7/8" x 1 7/8" 

From light solid, cut:


3 strips, 1 1/4" x 42", subcut 80 squares, 1 1/4" x 1 1/4"


2 strips, 3" x 42", subcut 20 squares, 3" x 3" 

2 strips, 1 5/8" x 42", subcut 40 squares, 1 5/8" x 1 5/8" cut: 

From gray setting fabric, cut:

1 strip 3 1/2" x 42", subcut 10 squares, 3 1/2" x 3 1/2"

1 strip 5 1/2" x 42", subcut 4 squares, 5 1/2" x 1 1/2" cut: 


2 squares, 3" x 3" cut: 

From gray print, cut: 3 strips, 1 1/2" x 42" | binding

Making the Blocks ~ instructions are for one block, repeat to make 20 blocks.

1. Fold the 1 1/2" dark square in half vertically and horizontally, and lightly crease to mark the center of each side. Fold four 1 5/8" light solid triangles in half, and lightly crease to mark the center of the long side. *Using a scant 1/4" seam* stitch triangles to opposite side of the square, matching the center creases. Stitch triangles to the remaining sides of the square. Trim the unit to 2" square, including seam allowances. Make 20 units.


2. Using 1 7/8" print triangles and 3" light triangles piece four flying geese as diagrammed. Trim each unit to 1 1/4" x 2", including seam allowances.

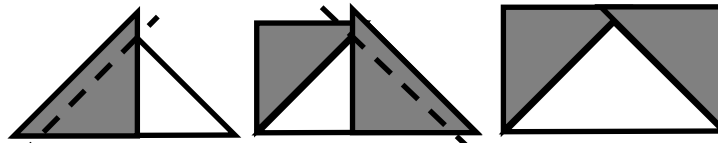

3. Arrange flying geese units, square-in-a-square center and 1 1/4" light squares in three rows. Sew the units into rows. Join the rows to make a Greige Galaxy block measuring 3 1/2" square, including seam allowances. Make 20 blocks.

Making the Quilt Top

1. Referring to the quilt diagram above, lay out the gray print squares, and Greige Galaxy blocks in diagonal rows. Add the gray print side triangles around the perimeter. Sew the pieces together in rows. Join the rows, matching the seam intersections. Add the corner triangles last. Square up the quilt top making sure to leave 1/4" beyond the points of all the squares for seam allowances.

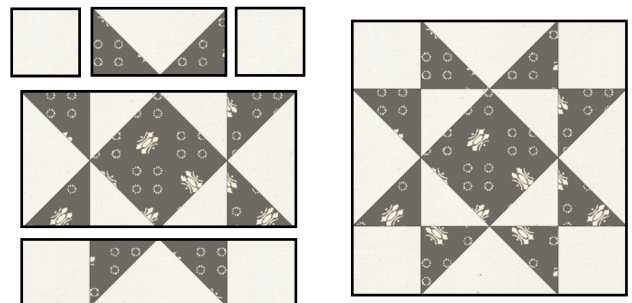

2. Quilt as desired, bind using single thickness binding. Enjoy!